


CLEANLAMT

Integrated AMT electronic control unit TCU

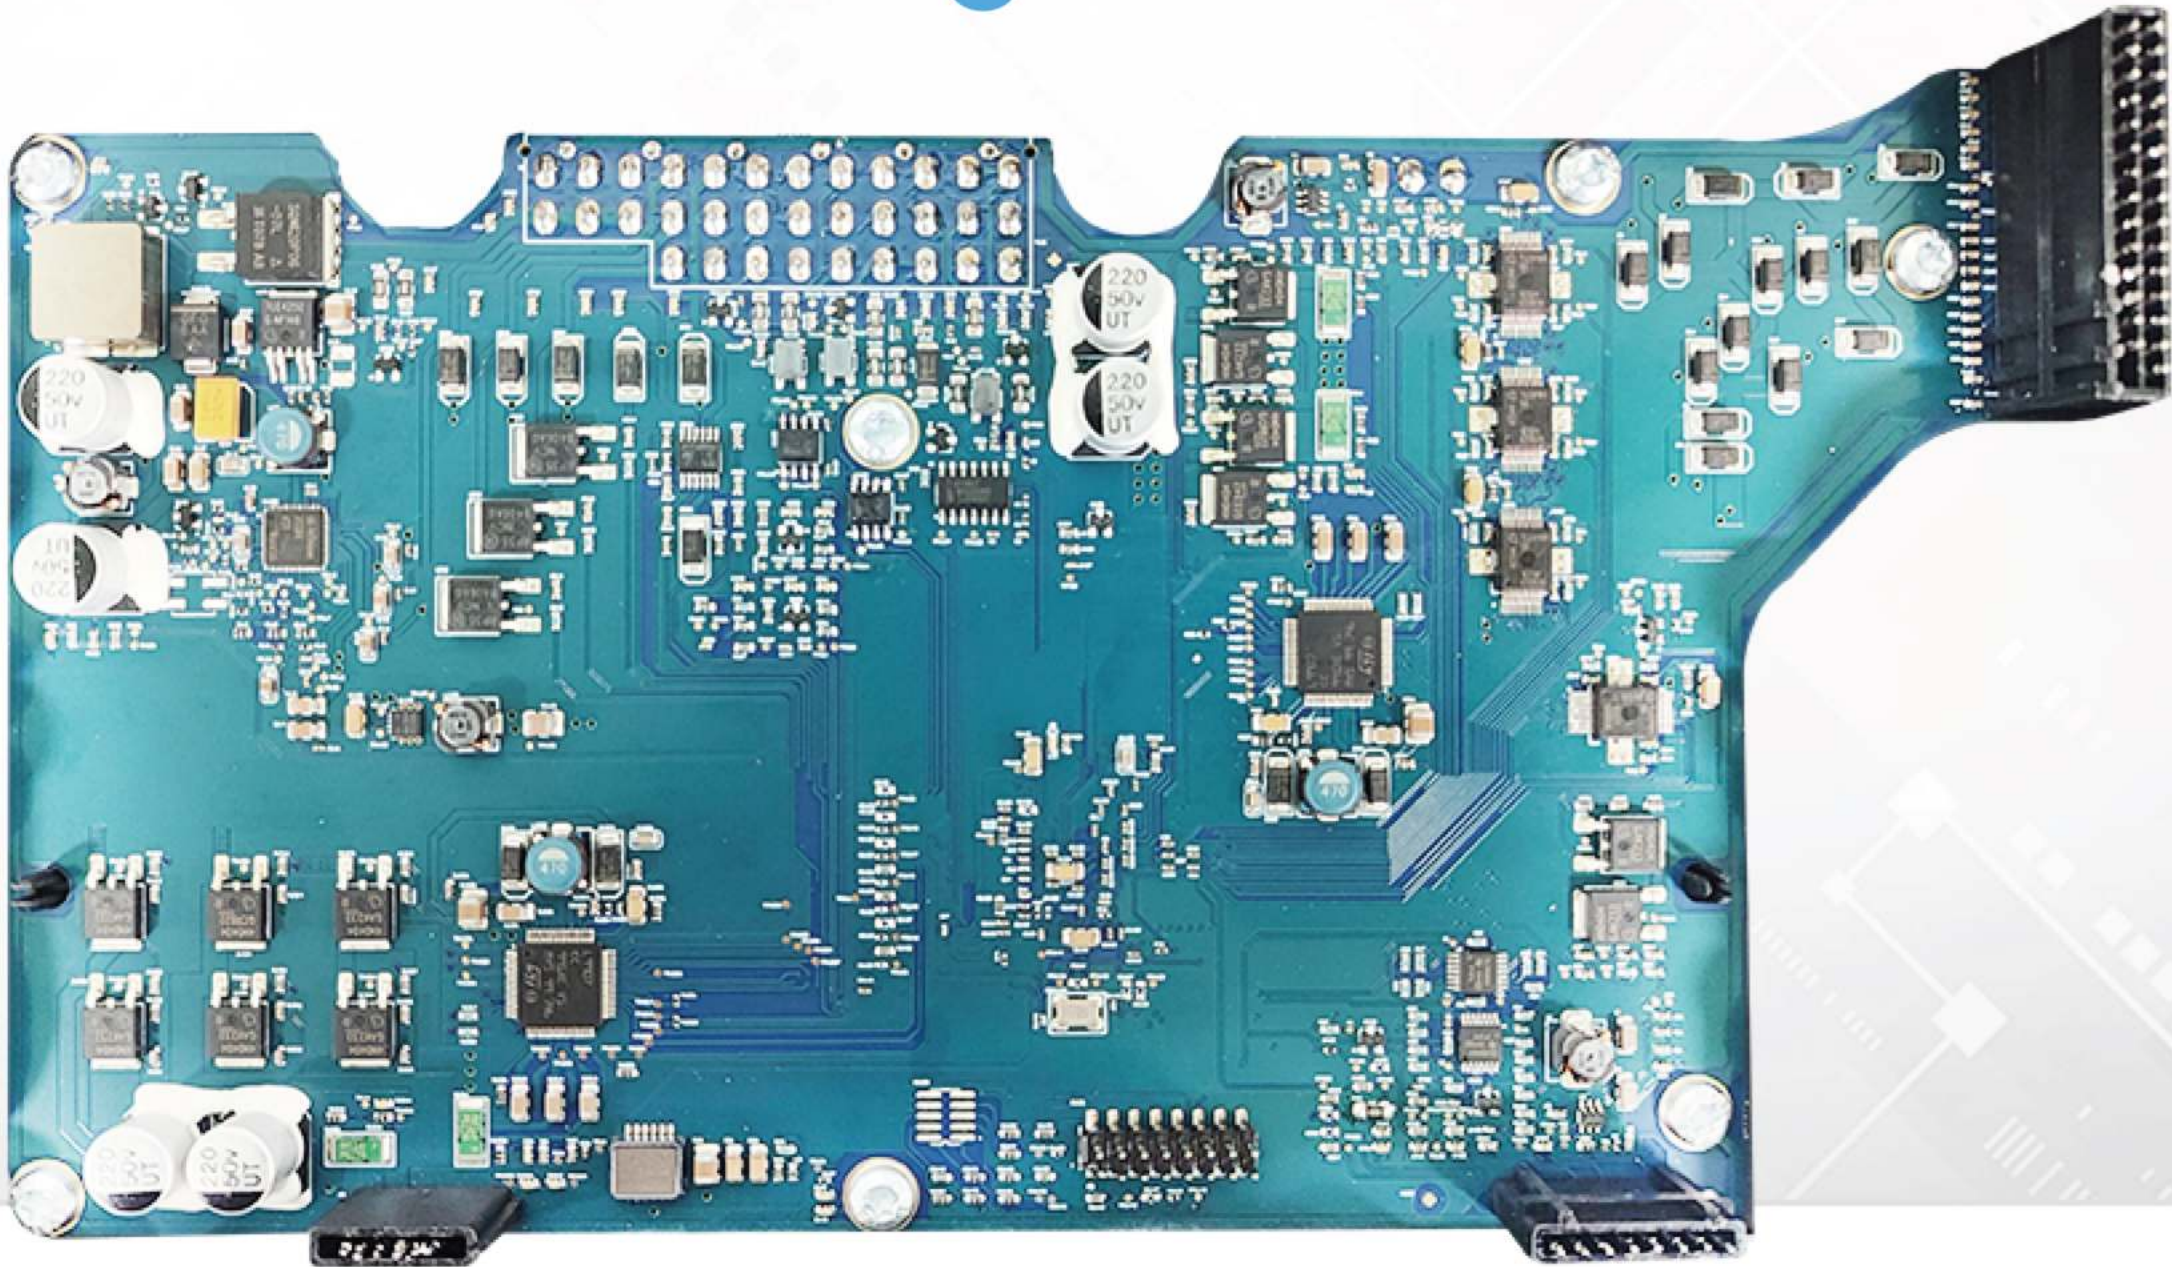

CPU Infineon TC297, Main Frequency 300MHZ, Flash 8M	Analog Input Total 7 routes	Switch input Total 5 routes
PWM Input Total 7 routes	High Side Drive Total 2 channels, drive capacity 3A	Full Bridge Drive Output Total 1 channel, rated voltage 12V/24V
low-side driver Total 17 channels, drive capacity 3A	CAN2.0 Communication, calibration, diagnostics; using the internal CAN module of the CPU	